Please type a plus sign (+) inside this box →

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY **PATENT APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

	The state of the s	praye a raile citie	7 00110.01 11	41110
Attorney Docket No.	COMP:0133/van P00-3172	Total Pages	63	PTO
First Name	d Inventor or Applic	cation Identifier	*	
				<u></u>
	Peter W. Austin	7		⊃
Express Mail Label No.	EL 652 334 32	23 US		

		APPLICATION ELEMENTS	,					oner for Patents
See M	IPEP chap	nter 600 concerning utility patent app	olication contents.	ADDF	RESS		stent Applicati ngton, DC 20	
1.		ee Transmittal Form		6.		Microfiche	Computer F	Program (Appendix)
2.	⊠ s	Submit an original, and a duplicate for Specification Total Pages preferred arrangement set forth below Descriptive	33	7.			and/or Ami	no Acid Sequence Submission
	-\$ -F -E -E -C	Cross References to Related Applicat Statement Regarding Fed sponsored Reference to Microfiche Appendix Background of the Invention Brief Summary of the Invention Brief Description of the Drawings (if it) Detailed Description	R & D		a. b. c.	Paper (e Copy cal to computer copy) g identity of above copies
		Claim(s) Abstract of the Disclosure						
						ACCOMPA	ANYING APP	LICATION PARTS
3.			al Sheets 7 al Pages 21	8.	Ø	Assignmen	t Papers (co	ver sheet & document(s))
		7016	arrages 21	9.			73(b) Staten <i>re is an assi</i>	
4.	a. [2 b. [r Declaration ☑ Newly executed (original or o ☑ Copy from a prior application .63(d))		10. 11.		English Tra Information		cument (if applicable) Copies of IDS
	i. ir	(for continuation/divisional with E [Note Box 5 below] DELETION OF INVENTOR Signed statement attac nventor(s) named in the prior appect 37 CFR 1.63(d)(2) and 1.33((S) hed deleting plication,	12.		Preliminary	Amendmen	t
5.	☐ Ir	ncorporation By Reference (useabl hecked) he entire disclosure of the prior appli	e if Box 4b is	13. 14.			y 🔲 State	d (MPEP 503) ement filed in prior application us still proper and desired
	co 1 s ao	opy of the oath or declaration is supp considered as being part of the disc ccompanying application and is hereb eference therein.	lousre of the					
				15.		(if foreign pri	opy of Priori iority is claime	ty Document(s) ed)
17	C Con	tinuation	- december	16.	<u> </u>	Other	ID) . (Parata Al
·		unuation Dr	visional		ontinua	tion-in-part (Cl	IP) of prior ap	plication No:/
			18. CORRESPO	ONDEN	CE A	DDRESS		
	Custome Label	er Number or Bar Code					Corresp	ondence address below
	Laber		Customer No. or A					
NAME		Robert A. Van Someren						
		Fletcher, Yoder & Van Somer	en					
ADDRI	ESS	P.O. Box 692289						
CITY				T =			= :0 ====	
CITY	TOV	Houston	STATE	Texas		15.45	ZIP CODE	77269-2289
COUN	1719	USA	TELEPHONE	(281)	970-4	1545	Fax	(281) 970-4503

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

PTO/SB/17 (10/96)

Approved for use through 09/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

		Comp	olete if Known	
		Application Number	Not Assigned	_
FEE TRA	NSMITTAL	Filing Date	Herewith	
		First Named Inventor	Peter W. Austin	
		Group Art Unit	Not Assigned	_
		Examiner Name	Not Assigned	_
TOTAL AMOUNT OF PAYMENT	(\$) 1,028.00	Attorney Docket Number	COMP:0133/VAN/P00-3172)	_

TOTAL	. AMO	UNT OF PAYM	IENT	(\$) 1,028.	00		Attorr	ney Do	cket N	umber	COMP:0133/VAN/P00-	3172)
				YMENT (che		<u></u>			FEE	CALC	ULATION (continued)	
٦.	. 🔲	The Commissi fees and credit		ereby authorized	d to charge	e indicated	3.	ADDIT	ΓΙΟΝΑ	L FEE	S	
Depos Accou			-	133/VAN (P	<u>00-3172</u>	<u>2)</u>	Large Fee Code	Entity Fee (\$)	Small Fee Code	Fee		To a Daile
Numb							105	(>) 130	205	(\$) 65	Fee Description Surcharge - late filing fee or oath	Fee Paid
Depos Accou	sit ınt	Fletcher, Y	oder &	Van Somer	∍n		127	50	227	25	Surcharge - late provisional filing or cover sheet.	_
Name				_			139	130	139	130	Non-English specification	_
F	ee Req	Any Additional quired Under 37		CFR 1.18	at the Ma	ee Set in 37	147	2,520 920*	147 112	2,520 920	For filing a request for reexamination Requesting publication of SIR	
	FR 1.1	6 and 1 17		Notice of 1.31(b)	Allowance	, 37 CFR				_	prior to Examiner action	
2.		Payment E		<u>d:</u>			113	1,840		1,840*	Requesting publication of SIR after Examiner action	_
	L	Check	∐ Mor	ney Order〔			115	110	215	55	Extension for response within first month	
				r	PTO-20:	38	116	400	216	200	Extension for response within second month	
	FEE	E CALCULA	ATION ((fees effective	/e 10/01	1/00)	117	950	217	475	Extension for response within third month	
		NG FEE					118	1,570	218	755	Extension for response within fourth month	_
Large E	-	Small	_				119	310	219	155	Notice of Appeal	_
Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Descrip	tion	Fee Paid	120	310	220	155	Filing a brief in support of an appeal	_
101	790	201	395	Utility filing fe	e	<u>\$710 00</u>	121	270	221	135	Request for oral hearing	_
106 107	330 540	206 207	165 270	Design filing		_	138	1,510	138	1,510	Petition to institute a public use proceeding	
108	790	208	395	Plant filing fe Reissue filing	; fee		140	110	240	55	Petition to revive unavoidably abandoned application	_
114	150	214	75 S	Provisional fil SUBTOTAL (1)	•		141	1,320	241	660	Petition to revive unintentionally abandoned application	_
			•)UDIOIAL (I)		(\$) <u>710.00</u>	142	1,320	242	660	Utility issue fee (or reissue)	_
					·		143	450	243	225	Design issue fee	_
۷.	CLA	IMS		5 - 6			144	670	244	335	Plant issue fee	_
			Extra	Fee from below		Fee Paid	122	130	122	130	Petitions to the Commissioner	
		<u>31</u> -20 =	<u>11</u>	X <u>18</u>	=	<u>\$198 00</u>	123	50	123	50	Petitions related to provisional applications	
Indepen Claims	ident _	<u>4</u> - 3 =	_1_	X <u>80</u>	=	\$ 80.00	126	240	126	240	Submission of Information Disclosure Stmt	
Multiple	Deper	ndent Claims		Χ	=		581	40	581	40	Recording each patent	<u>40 00</u>
Large E		Small E	Entity	· —		_					assignment per property (times number of properties)	
Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Descript	ion		146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	_
103	22	203	11	Claims in exc	ess of 20		149	790	249		For each additional invention	_
102	82	202	41	Independent excess of 3	claims in		201				to be examined (37 CFR 1.129(b))	
104	270	204	135	Multiple depe	ndent clai	m		fee (spe				
109	82	209	41	Reissue indepe			Otner	fee (spe	cify)		SUBTOTAL (3)	<u>—</u>
110	22	210	11	claims over ong Reissue claims of 20 and over t	in excess o	of	* Re	duced	by Ba	sic Fili	ng Fee Paid	(\$) <u>40.00</u>
			SUBTO	OTAL (2)	Jiginai paa	(\$) <u>278.00</u>						ı
						\ \ \ \\						J

SUBMITTED BY				·		Complete (if applicable)
Typed or Printed Name	Robert A. Van Someren	Reg. N	lumber	36,038		
Signature	Motor Hila	Date	Novembe	21, 2000	Deposit Acct User ID	COMP:0133/VAN P00-3172

U.S. Patent Application For

COMPUTER SYSTEM HAVING HARD DRIVE LATCHING MECHANISM

By:

Peter W. Austin Spring, Texas

Arthur K. Farnsworth Houston, Texas

"EXPRESS MAIL" MAILING LABEL Number EL 652 334 323 US
Date of Deposit: November 21, 2000
Pursuant to 37 C.F.R. § 1.10, I hereby certify that I am personally depositing this paper or fee with the U.S. Postal
Service. "Express Mail Post Office to Addressee" service on the date indicated above in a sealed envelope (a) having the above-
numbered Express Mail label and sufficient postage affixed, and (b) addressed to the Assistant Commissioner for Patents.
Washington, D.C. 20231
Signature Africa + Huitig
Printed Name: Lynda Howell

COMPUTER HAVING HARD DRIVE LATCHING MECHANISM

FIELD OF THE INVENTION

The present invention relates generally to a computer system having a computer hard drive, and particularly to a system for securing one or more computer hard drives to a computer chassis with a single actuator and without the use of tools.

10

20

BACKGROUND OF THE INVENTION

A computer system is typically comprised of a variety of different devices, such as a monitor, keyboard, and mouse, connected to a central unit, commonly referred to as the computer. Typically, the computer houses a variety of components within a protective enclosure. For example, a typical computer has one or more hard drives for permanently storing data, such as computer programs. A typical computer also has a central processing unit, or CPU, that controls the operation of the computer in accordance with the computer programming stored in the hard drive. The computer uses temporary memory, or RAM, to transfer data between the hard drive and CPU. The computer

also has a power supply to supply power to the hard drive, CPU and RAM.

Securing mechanisms that do not require the use of a tool have been used to secure a hard drive to a computer. Typically, these mechanisms secure the hard drive with guides and an actuator drive, such as a flexible strip with a hole. During the installation process, the hard drive is inserted into the guides. The flexible strip is flexed out of its normal position by the hard drive during installation. When installed, the flexible strip returns to its normal position such that the hole in the flexible strip fits over a screw head on the hard drive, preventing the removal of the hard drive from the guides. To remove the hard drive, a force must be applied to bend the flexible strip so that it does not obstruct the movement of the hard drive and the hard drive can be removed from the guides.

Therefore, it would be advantageous to have a system that would allow a computer hard drive to be installed and removed, without the use of tools, with no loose parts

produced, and without the need for a bending force to be applied during the removal of the hard drive.

It also would be advantageous to have a system that could allow more than one computer hard drive to be installed and removed with a single actuator, without the use of tools, and with no loose parts produced.

10 SUMMARY OF THE INVENTION

According to one aspect of the present invention, a computer system having a chassis, a processor, a hard drive securing mechanism, and at least one hard drive is featured. The hard drive securing mechanism is operable to secure one or more hard drives to the chassis with a single actuator. The hard drive is coupled to the processor and secured to the chassis by the hard drive securing mechanism.

According to another aspect of the present invention, a computer hard drive securing system having a chassis, a plurality of guides secured to the chassis, a hard drive carrier and a securing lever is featured. The securing

lever is operable to secure one or two hard drives to the chassis in cooperation with the plurality of guides and the hard drive carrier. The carrier is configured to support a computer hard drive.

5

10

20

According to another aspect of the present invention, a method of securing a plurality of hard drives to a computer chassis is featured. The method includes disposing a first hard drive between a first restraint and the securing lever. The method further includes the act of disposing a second hard drive between a second restraint and the carrier. Additionally, the method includes rotating the securing lever to secure the first hard drive and the second hard drive. The first hard drive is secured by the first restraint and the lever, and the second hard drive is secured by the carrier and the second restraint.

According to another aspect of the present invention, a rotatable lever for securing a hard drive to a chassis is featured. The rotatable lever has a plurality of guides.

The guides are configured to receive a protruding member when the securing lever is in a first position and to

restrict the protruding member when the securing lever is in a second position.

5 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements, and:

Figure 1 is a block diagram of a computer system;

Figure 2 is a perspective view of a computer chassis having a hard drive latching mechanism securing two hard drives to the chassis with a single actuator, according to a preferred embodiment of the present invention;

Figure 3 is a top view of a computer hard drive;

Figure 4 is a perspective view of the computer chassis of Figure 2 with the two hard drives removed;

Figure 5 is a front elevational view of the hard drive latching system of Figure 4, illustrating the installation

of a first hard drive into the hard drive latching mechanism, according to a preferred embodiment of the present invention;

Figure 6 is a front elevational view of the hard drive latching system of Figure 5, illustrating the installation of a second hard drive into the hard drive latching mechanism;

Figure 7 is a front elevational view of the computer chassis of Figure 6, illustrating two hard drives positioned within the hard drive latching system with the securing lever in an upright position;

Figure 7A is an expanded view of the cam of the lever and a curved end of a carrier, taken generally along line 7A-7A of Figure 7;

Figure 8 is a front elevational view of the computer chassis of Figure 6, illustrating two hard drives positioned within the hard drive latching system with the securing lever in a horizontal, or secured, position;

20

Figure 8A is an expanded view of the cam of the lever and a curved end of a carrier, taken along line 8A-8A of Figure 8;

Figure 8B is a cross-sectional view illustrating a securing lever, carrier, and a tab, taken along line 8B-8B of Figure 8;

Figure 8C is an expanded view of a curved end of a carrier and a hard drive head, taken along line 8C-8C of Figure 8;

Figure 9 is a front elevational view of a computer chassis illustrating a shelf disposed over a hard drive, according to a preferred embodiment of the present invention;

Figure 10 is a front elevational view of an actuator end of a securing lever, according to a preferred embodiment of the present invention;

Figure 11 is a rear elevational view of an actuator end of a securing lever, according to a preferred embodiment of the present invention;

Figure 12 is a front elevational view of a computer illustrating a single hard drive secured in a hard drive latching mechanism, according to a preferred embodiment of the present invention; and

5

Figure 13 is a front elevational view of a computer chassis having a hard drive latching mechanism for securing a single hard drive, according to a preferred embodiment of the present invention.

10

20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring generally to Figure 1, a block diagram depicting an exemplary computer system, generally designated by the reference numeral 20, is featured.

Computer 20 may be any of a variety of different types, such as a server, desktop computer, or workstation. In the illustrated embodiment, a processor 22 controls the functions of computer system 20. Computer 20 also includes a power supply 24 to supply power to various components within the system 20.

20

Various other devices may be coupled to processor 22, depending upon the desired functions of computer 20. For example, a user interface 26 may be coupled to processor 22. Examples of user interfaces 26 include buttons, switches, a keyboard, a light pen, a mouse, and/or a voice recognition system. A display 28 may also be coupled to processor 22. Examples of displays 28 include: a television screen, a computer monitor, LEDs, or even an audio display. Additionally, a communications port 32 may be coupled to processor 22. Communications port 32 may be adapted to be coupled to a peripheral device 34, such as a printer, a computer or an external modem.

Typically, processor 22 utilizes programming to control the operation of computer 20. Memory is coupled to processor 22 to store and facilitate execution of the programming. In the illustrated embodiment, processor 22 is coupled to a volatile memory 36 and two hard drives utilized as non-volatile memory. The present hard drive latching system, discussed below, is particularly amenable to securing two hard drives. Non-volatile memory 38 also may include a high capacity memory such as a disk or tape drive memory. Non-volatile memory 38 may include a read

only memory (ROM), such as an EPROM, to be used in conjunction with volatile memory 36. A variety of memory modules, such as DIMMs, DRAMs, SDRAMs, SRAMs, etc. also may be utilized as volatile memory 36 for a given device.

5

10

Referring generally to Figure 2, an exemplary embodiment of a hard drive latching system 40 is illustrated. In the illustrated embodiment, hard drive latching system 40 can secure one or two hard drives. As best illustrated in Figure 3, each hard drive 42 has a plurality, e.g. four, support members 44, such as screws threaded into the body 46 of the hard drive. Each screw 44 has an extending head 48. Each hard drive 42 also has a power connector 50 for coupling power to the hard drive and a data connector 52 for transferring data to and from hard drive 42.

Referring again to Figure 2, the illustrated embodiment of hard drive latching system 40 can be operated to secure one or two hard drives. Hard drive latching system 40 includes a plurality of tabs formed in chassis 56, a carrier 58, and a securing lever 60.

In the illustrated embodiment, chassis 56 is formed of sheet metal. The tabs are formed by cutting patterns in sheet metal portions of chassis 56 and performing a series of bending operations to shape the tabs. The tabs are used to restrict and guide the movement of the hard drives, carrier 58 and securing lever 60. Rather than forming a plurality of tabs, a separate guide assembly may be constructed and secured to chassis 56 to perform the same function as the plurality of tabs. Additionally, a single device may be used where multiple tabs are used in consort.

Two first tabs 64 are used to secure a first hard drive 66. Each first tab 64 has a securing notch 68. Securing notch 68 is shaped to restrict motion of heads 48 on a first hard drive 66. Each first tab 64 also has an inclined leading edge 70 to direct a head 48 into proper position in notch 68.

Two second tabs 72 are used to secure carrier 58 and
lever 60 to chassis 56. Each second tab 72 has a hole 74
therethrough. In the illustrated embodiment, securing
lever 60 has a pin 76 at each end. Securing lever 60 is
secured by inserting each pin 76 into a corresponding hole

74 in each second tab 72. The holes 74 and pins 76 allow securing lever 60 to rotate smoothly from an upright to a horizontal position. Each second tab 72 also has a notch 78. Each notch 78 guides a first pin 80 on carrier 58

5

A third tab 82 is used to secure lever 60. Third tab 82 is shaped to form a catch 84. Lever 60 includes a pin 86 disposed at the end of a flexible member 88. When lever 60 is in the horizontal, or secured position, catch 84 restricts the movement of pin 86.

20

10

Two fourth tabs 90 and two fifth tabs 92 are used with second tabs 72 to slidingly secure carrier 58 to chassis 56. Each fourth tab 90 has a notch 94 that directs the movement of a second carrier pin 96 on carrier 58. As best illustrated in Figure 4, carrier 58 also includes two guide rods 98 secured to mounts 100 on carrier 58. Each of the fifth tabs 92 has a notch 102 to direct guide rods 98 as carrier 58 is moved. A spring 104 is inserted over each guide rod 98 between each fifth tab 92 and mount 100.

Springs 104 bias carrier 58 towards securing lever 60.

10

15

20

Referring again to Figure 2, two sixth tabs 106 are used with carrier 58 to secure a second hard drive 108. Each sixth tab 106 has a notch 110 to restrict motion of a head 48 on second hard drive 108. Each sixth tab 106 also has an inclined edge 112 to direct second hard drive 108 into proper securing position.

Carrier 58 has two guide rails 114 along sides 116 of carrier 58. Each guide rail 114 supports a head 48 on second hard drive 108. Each guide rail 114 includes a curved end 118 configured to restrict a head 48 on second hard drive 108 when the latch mechanism is operated.

Carrier 58 also has a curved end 120 configured for engagement with lever 60. Curved end 120 also has a flat portion 121.

Securing lever 60 has an actuator end 122 and a distal end 124 connected by a rod 126. Actuator end 122 and distal end 124 have a cam 128 configured for sliding engagement with curved end 120 of carrier 58 and a flat portion 129 configured to engage flat portion 121 of curved end 120 when lever 60 is in a vertical position, thus acting to stop further movement of lever 60 past vertical.

Cam surface 128 forces curved end 120 towards fifth tabs 92 as lever 60 is rotated counterclockwise from an upright to a horizontal position.

Actuator end 122 and distal end 124 each include a tapered notch 130. Each tapered notch 130 is designed to guide a head 48 of first drive 66 into a proper position in securing lever 60. Each tapered notch 130 is configured so that heads 48, hole 74, and pin 76 are aligned along an axis 131. Lever 60 also includes a tab 132 to facilitate manual rotation of lever 60.

Referring generally to Figures 5 through 9, the process of securing hard drives 66 and 108 in chassis 56 is illustrated. Referring generally to Figure 5, first hard drive 66 is initially positioned with first heads 134 of heads 48 inserted into notches 68 of first tabs 64 to install first hard drive 66 in latching system 40. First hard drive 66 is then pivoted towards securing lever 60, as referenced by arrow 135, such that second heads 136 of heads 48 are inserted into tapered notch 130. The taper of each notch 130 guides each heads 136 into position.

20

Referring generally to Figure 6, to install second hard drive 108 into hard drive latching system 40, second hard drive 108 is initially positioned with leading heads 138 of heads 48 inserted into notches 110 of sixth tabs 106. Second hard drive 108 is then pivoted towards carrier 58, as referenced by arrow 139, such that trailing screw heads 140 of heads 48 are placed on rail 114.

Referring generally to Figure 7, to secure hard drives 66 and 108, lever 60 is rotated from the upright position to a horizontal position, as referenced by arrow 141. As best illustrated in Figure 7A, second heads 136 are unsecured by lever 60 when lever 60 is in the upright position. At this stage, hard drive 66 may be lifted and removed from hard drive latching system 40.

Referring generally to Figures 8 and 8A, hard drives 66 and 108 are secured in hard drive latching system 40 when lever 60 is in the horizontal position. As best illustrated in Figure 8A, each tapered notch 130 of lever 60 is rotated about a respective second head 136 as lever 60 is rotated from the upright position to the horizontal position. Thus, first and second heads 134 and 136 are

10

15

20

secured between notches 68 on first tabs 64 and tapered notches 130 on lever 60. Pin 86 on flexible member 88 is captured by catch 84 on third tab 82 when lever 60 rotated to the horizontal position. Tab 132 is provided for an operator to easily manipulate lever 60.

As illustrated in Figure 8A, cam 128 of lever 60 slidingly engages curved end 118 of carrier 58 as lever 60 is rotated counterclockwise. The shape of cam 128 causes carrier 58 to be driven linearly to the right, in this view, as illustrated by arrow 142. A top view of the orientation of carrier 58, lever 60, and second tabs 72 at the point of engagement is illustrated in Figure 8B.

Referring again to Figure 8, the rotating motion of cam 128 is translated into linear motion of carrier 90 as lever 60 is rotated counterclockwise. The linear motion of carrier 60 to the right compresses springs 104. As best illustrated in Figure 8C, curved ends 118 of carrier 58 move against trailing heads 140 of second hard drive 108 as carrier 58 is moved to the right by lever 60. Leading and trailing heads 138 and 140 are secured between notches 110

20

on sixth tabs 106 and curved ends 118 of carrier 58 with lever 60 in the horizontal position.

To remove a hard drive, lever 60 is rotated in a clockwise direction. When lever 60 is in an upright, or unsecured position, heads 136 are no longer restrained by tapered notch 130. Thus, first hard drive 66 can be removed from hard drive latching system 40. Additionally, cam 128 is moved towards the left as lever 60 is rotated clockwise. Compressed springs 104 drive carrier 58 to the left, against cam 128, as lever 60 is rotated clockwise.

As carrier 58 moves to the left, curved ends 118 also move to the left. Curved ends 118 do not restrain heads 140 when lever 60 is in a fully upright position. At this stage, second hard drive 108 may be removed from system 40.

Referring generally to Figure 9, a moveable shelf 143 may be used as a part of chassis 56. Shelf 143 may be used to secure a printed circuit board or some other component. In the illustrated embodiment, shelf 143 is hinged such that it may be lowered over first hard drive 66. Shelf 143 is disposed over tab 132 of lever 60 such that lever 60 can not be rotated clockwise to the upright, or unsecured,

15

20

position. Thus, assisting hard drive latching system 40 secure the hard drives to chassis 56. Additionally, shelf 143 may not be lowered over hard drive 66 unless rotatable lever 60 is in the horizontal, or secured, position. Thus, shelf 143 acts as a second check to ensure that rotatable lever 60 is in the secured position, securing the hard drives to the chassis, before a assembly of the enclosure cover is completed.

In Figures 10 and 11, front and rear views of actuator end 122 of securing lever 60 are illustrated. In Figure 12, hard drive latching system 40 is illustrated as securing a single hard drive 42 to the chassis. An additional hard drive may be added at a later time.

Referring generally to Figure 13, an exemplary embodiment of a hard drive latching mechanism 144 for securing a single hard drive to the chassis is featured. The operation of hard drive latching mechanism 144 is similar to the operation of hard drive latching mechanism 40. In the illustrated embodiment, a securing lever 146 and a plurality of tabs are used to secure a hard drive 42

to chassis 56. Alternatively, a securing lever 146 and a carrier can be used to secure a single hard drive 42.

It will be understood that the foregoing description

is of preferred exemplary embodiments of this invention,

and that the invention is not limited to the specific forms

shown. For example, devices other than tabs formed in the

chassis may be used to restrict the movement of the screw

heads of the hard drives, or guide the hard drives.

Additionally, a single device secured to the chassis may serve the same purpose as a plurality of tabs.

Furthermore, the tabs may be used to restrict the movement of screw heads attached to the hard drive or to fixed portions of the hard drive. These and other modifications may be made in the design and arrangement of the elements

without departing from the scope of the invention as

expressed in the appended claims.

CLAIMS

What is claimed is:

1. A computer system, comprising:

5

a chassis;

a processor;

10

a hard drive securing mechanism, the hard drive securing mechanism being operable to secure a plurality of hard drives to the chassis with a rotatable lever; and

15

at least one hard drive secured by the hard drive securing mechanism.

15

- 2. The system as recited in claim 1, wherein each hard drive includes a plurality of protruding members, further wherein the hard drive securing mechanism is operable to secure the plurality of hard drives by restricting the movement of the plurality of protruding members.
- 3. The system as recited in claim 1, the hard drive securing mechanism further comprising:
 - a plurality of guides secured to the chassis to restrict the movement of the plurality of protruding members; and

a hard drive carrier,

wherein the rotatable lever includes a plurality of tapered guides, each tapered guide being configured to receive and secure a protruding member.

- 4. The system as recited in claim 2, wherein a first hard drive is securable between the lever and a first set of guides.
- 5 The system as recited in claim 3, wherein each tapered guide is configured to receive a protruding member when the rotatable lever is in a first position, further wherein, each tapered guide is configured to prevent movement of a protruding member when the lever is in a second position.
 - 6. The system as recited in claim 5, wherein the rotatable lever includes a protrusion biased by a flexible member, further wherein the protrusion is captured when the securing lever is disposed in the second position.
- 7. The system as recited in claim 3, wherein a second hard drive is securable between the hard drive carrier and a second set of guides.

8. The system as recited in claim 3, wherein the rotatable lever is operable to drive the carrier towards the second set of guides.

5

9. The system as recited in claim 8, wherein the rotatable lever comprises a cam configured for sliding engagement with the carrier.

10

- 10. The system as recited in claim 9, further comprising a spring, wherein the spring is compressed as the rotatable lever is rotated in a first direction, further wherein the spring biases the carrier towards the rotatable lever when the rotatable lever is rotated in a second direction.
- 11. The system as recited in claim 3, wherein the
 20 rotatable lever comprises a tab for operating the rotatable
 lever.

- 12. The system as recited in claim 5, wherein the rotatable lever comprises a stop that engages a surface on the carrier to prevent rotation of the rotatable lever past the first position as the rotatable lever is rotated in the second direction.
- moveable obstruction disposable over the rotatable lever, wherein when the moveable obstruction is disposed over the rotatable lever, the moveable obstruction prevents the rotatable lever from rotating from the second position to the first position, and further wherein, when the rotatable lever is disposed in the first position, the rotatable lever prevents the moveable obstruction from being disposed over the rotatable lever.

- 14. A hard drive securing system, comprising:
 - a plurality of guides secured to a chassis;
- a hard drive carrier held by a first plurality of guides and configured to support a computer hard drive; and
 - a securing lever mechanism operable to secure the plurality of hard drives to the hard drive carrier.
 - 15. The system as recited in claim 14, wherein the securing lever mechanism has a guide portion configured to receive a portion of a hard drive when the securing lever mechanism is in a first position.
- 16. The system as recited in claim 15, wherein a
 20 first hard drive is secured when the securing lever
 mechanism is rotated to a second position.

17. The system as recited in claim 16, wherein the securing lever mechanism is operable to rotate from the first position to the second position.

5

18. The system as recited in claim 17, wherein the securing lever mechanism comprises a latch to secure the securing lever when the securing lever is in the second position.

10

19. The system as recited in claim 18, wherein the securing lever is configured with a cam to drive the hard drive carrier as the securing lever mechanism is rotated from the first position to the second position.

20

15

20. The system as recited in claim 19, comprising a spring, wherein the spring opposes movement of the hard drive carrier produced by the securing lever mechanism and drives the carrier as the securing lever mechanism is rotated from the second position to the second position.

21. The system as recited in claim 20, wherein the hard drive carrier is configured to secure a second hard drive against a second plurality of guides when the securing lever mechanism is in the second position.

5

22. A method of securing a plurality of hard drives to a computer chassis, comprising:

10

disposing a first hard drive between a first restraint and a securing lever;

15

deploying a second hard drive between a second restraint and a carrier configured to direct the movement of the second hard drive; and

20

rotating the securing lever to simultaneously
secure the first hard drive by the first
restraint and the lever and the second hard
drive by the carrier and the second
restraint.

23. The method as recited in claim 22, further comprising:

providing each hard drive with a plurality of protruding members.

5

24. The method as recited in claim 23, further comprising:

10

configuring the securing lever with a tapered guide to receive a first plurality of protruding members in a first position of the securing lever and to restrict movement of the first plurality of protruding members in a second position of the securing lever.

20

25. The method as recited in claim 22, further comprising:

to drive the carrier in a first direction as the securing lever is rotated from a first position to a second position.

10 26. The method as recited in claim 25, further comprising:

providing the chassis with a spring mechanism configured to oppose the movement of the carrier by the securing lever; and

using the spring mechanism to bias the carrier

against the securing lever as the securing

lever is rotated from the second position to

the first position.

COMP: 0133 P00-3172

5

27. The method as recited in claim 22, further comprising:

forming the restraints by cutting and bending a portion of the chassis to form a plurality of tabs, each tab configured to restrict the movement of a protruding member.

28. A rotatable lever for securing a hard drive, having a plurality of protruding members, to a chassis, comprising:


a plurality of guides, each guide being configured to receive a protruding member when the securing lever is in a first position and to restrict the protruding member when the securing lever is in a second position.

20


- 29. The rotatable lever as recited in claim 28, further comprising
- a first portion including at least one of the plurality of guides;
 - a second portion including at least a second of the plurality of guides and an operator; and
- a connector, connecting the first and second portions.
- 30. The rotatable lever as recited in claim 29, wherein the first portion and second portion include a cam surface.
- 31. The rotatable lever as recited in claim 30, 20 wherein each guide is tapered.


ABSTRACT OF THE DISCLOSURE


A computer system having a hard drive securing system. The hard drive securing system is operable to secure one or more hard drives to a chassis with a single operator. The hard drive securing system uses a plurality of hard drive guides, a hard drive carrier, and a securing lever to secure a plurality of hard drives to a chassis without the use of tools.

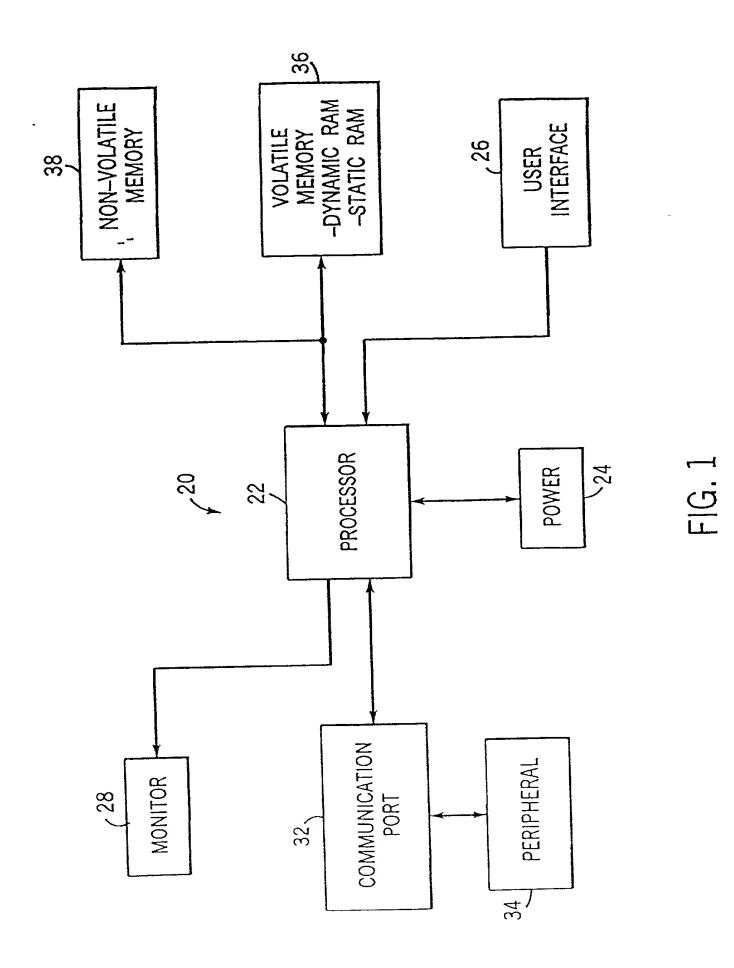



+

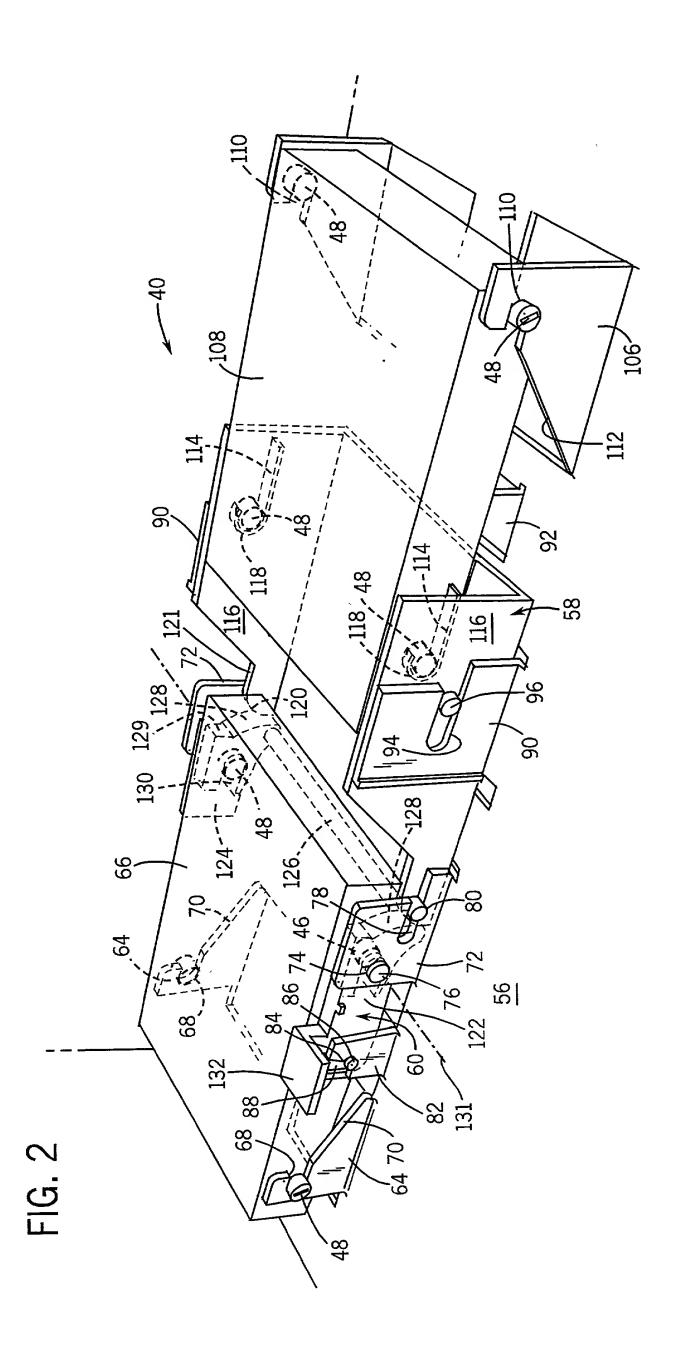


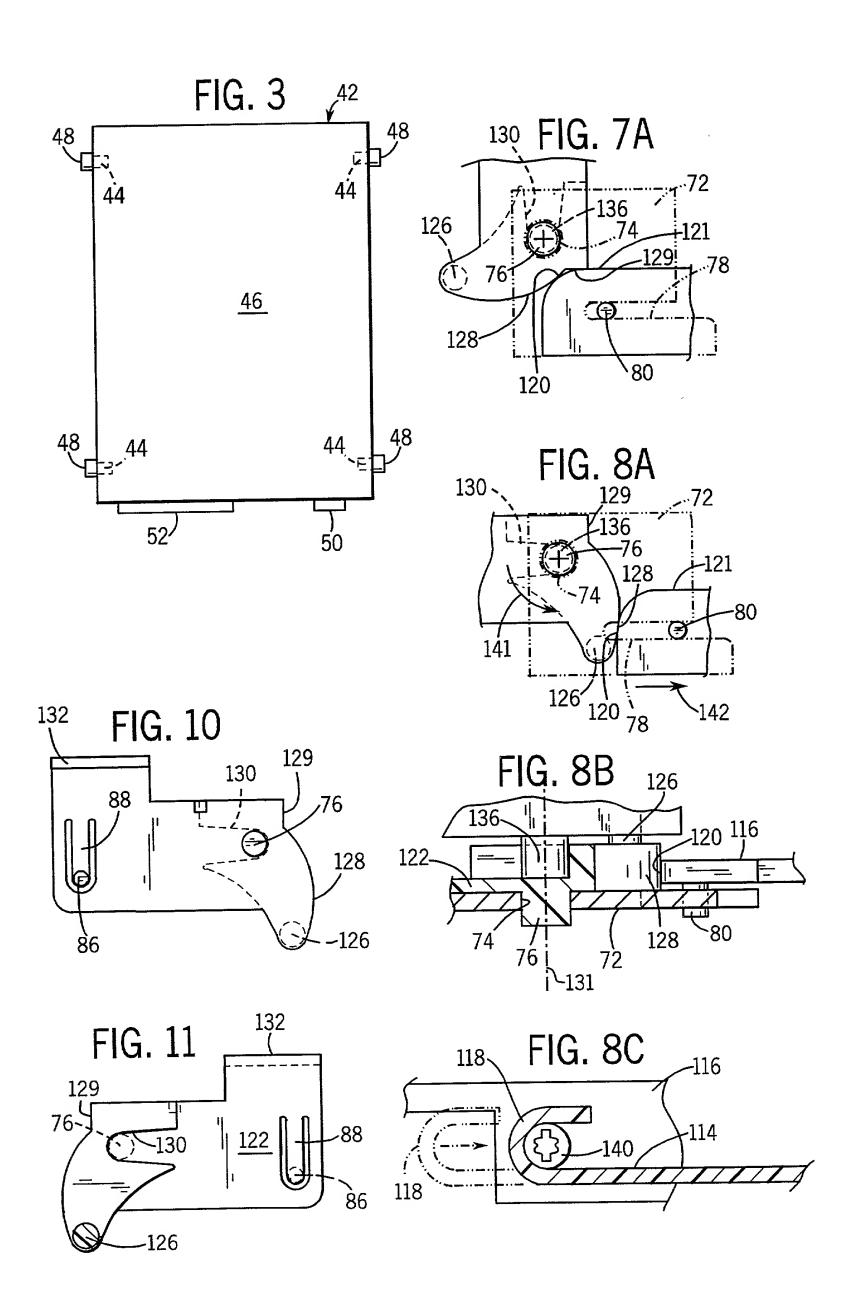


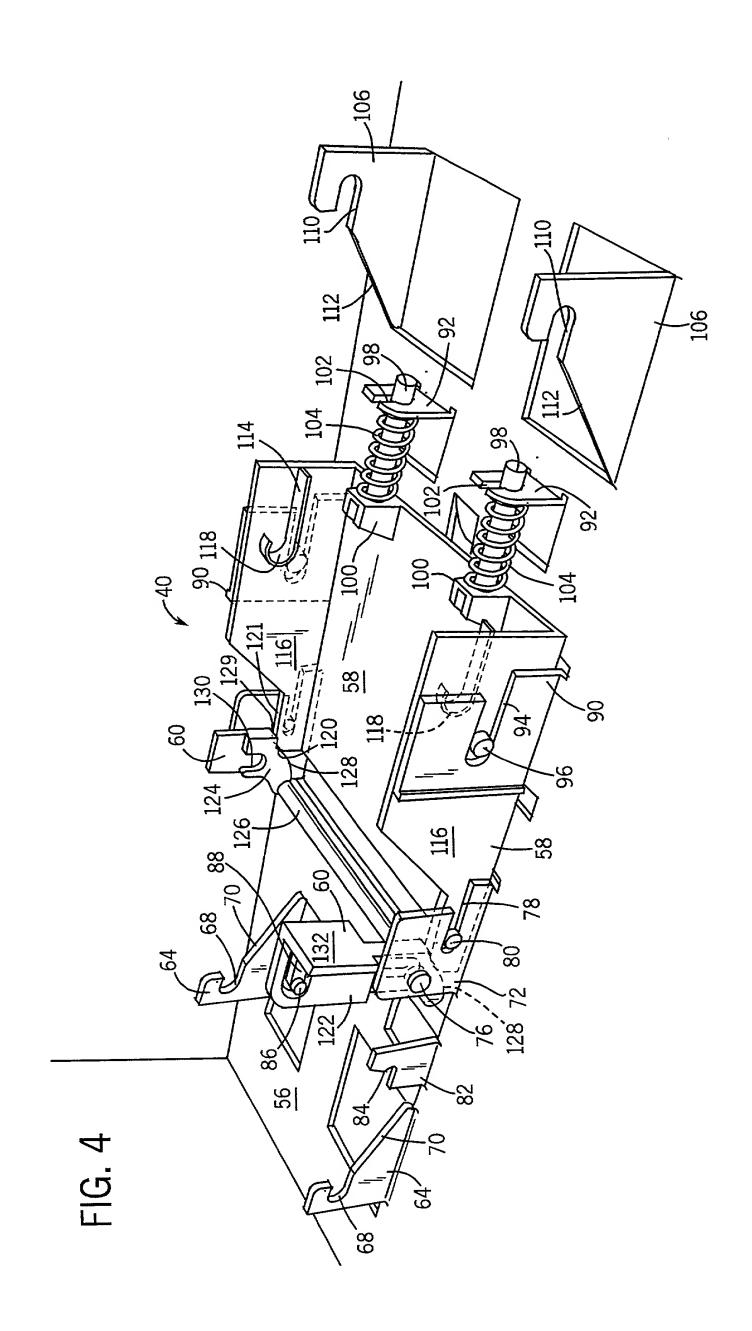

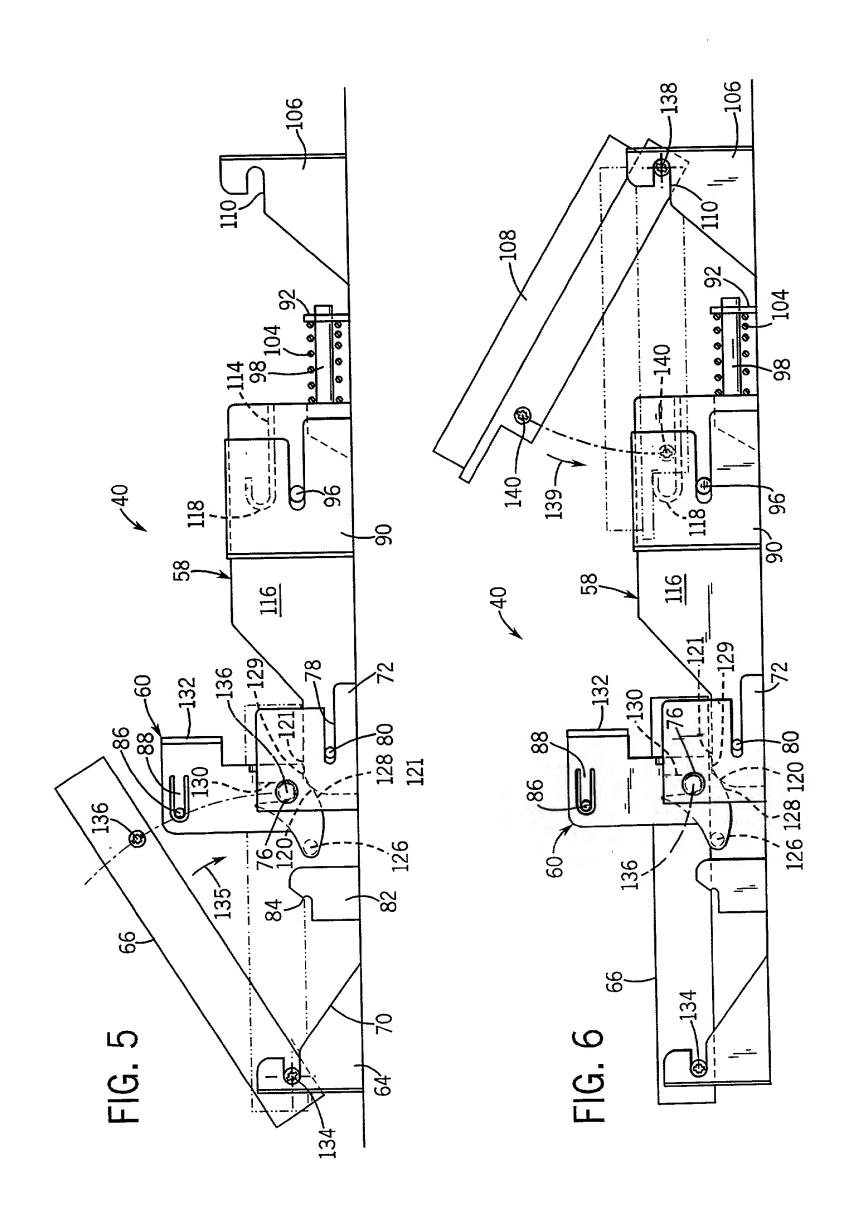

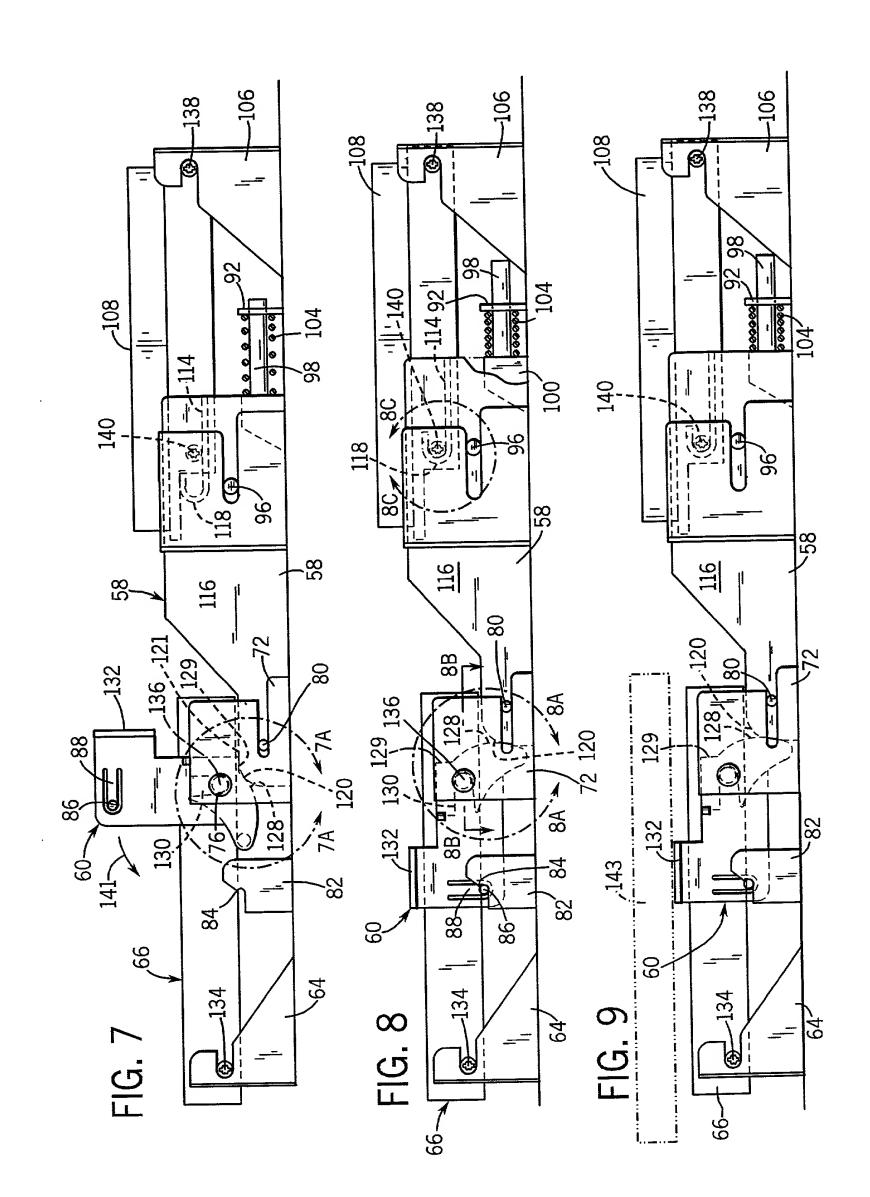

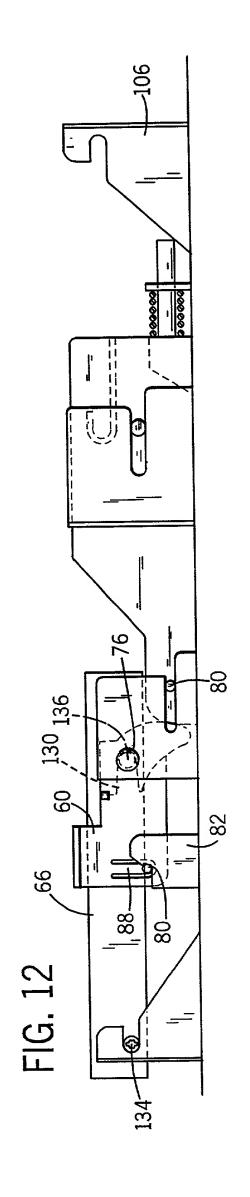

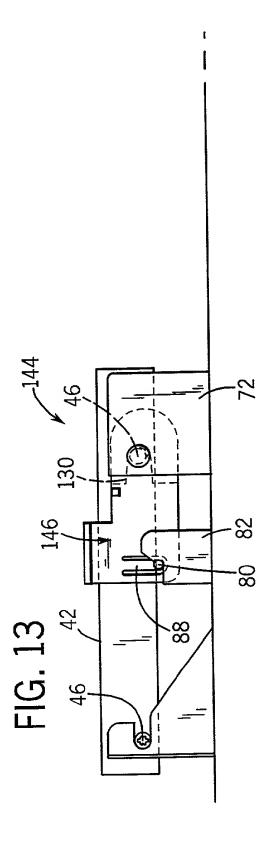

Attorney Docket No.: COMP:0133 (P00-3172)

DECLARATION

SOLE/JOINT INVENTOR ORIGINAL/SUBSTITUTE/CIP

As a below named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

COMPUTER SYSTEM	HAVING HARD	DRIVE LA	ATCHING MECHANISM	
		1		
	X attached or	1	ication Serial No.	
filed		and amende	ed on	
above; that I do not know and do not be described in any printed publication in patented or made the subject of an investigation filed by me or my legal reprof which I am aware which is material to material when it is not cumulative to interest the subject of an investigation of which I am aware which is material to interest the subject of the subject of an investigation of the subject of	elieve the same was ever ke any country before my or a ntor's certificate issued be resentative or assigns more to the examination of this a formation already of recor	nown or used in the our invention there efore the date of this than twelve month application in accord or being made of	ed specification, including the claims, as a e United States of America before my or or of or more than one year prior to this application in any country foreign to the hs prior to this application; and that I acknowledge of the application, and frecord in the application, and	our invention thereof, or patented or ication; that the invention has not been United States of America on an anowledge the duty to disclose information gulations § 1.56(a). Such information is
(2) it refutes, or is income	nsistent with, a position th	ne applicant has tak	ten or may take in:	
Lereby claim foreign priority benefits also identified below any foreign applic	•	ntability.	n by the Office, or any foreign application(s) for patent or inverse application(s) on which priority is claim	
COUNTRY	APPLICATION N	NUMBER	DATE OF FILING	PRIORITY CLAIMED
# «				UNDER 35 USC 119
The state of the s				YES NO
hereby claim the benefit under Title 3: this application is not disclosed in the p	rior United States Applica	ation, I acknowledg	ates application(s) listed below and, insofage the duty to disclose material information and the national PCT international filing	as defined in Title 37, Code of Federal
further that these statements were made	with the knowledge that v	willful false statem	hat all statements made on information an ents and the like so made are punishable b tents may jeopardize the validity of the ap	y fine or imprisonment, or both, under
FULL NAME OF SOLE OR FIRST IN	VENTOR	INVENTOR'	S SIGNATURE .	DATE
Peter W. Austin		to.Y	when H. W.	11-15-00
RESIDENCE	~ · · · · · · · · ·	INCOME		CITIZENSHIP
8738 Desert Palms Drive.	Spring, Texas 7	7379, U.S.A		U.S.A.
8738 Desert Palms Drive	, Spring, Texas 7	7379, U.S.A	·•	
FULL NAME OF SECOND JOINT IN	VENTOR	INVENTOR'	S SIGNATURE	DATE
Arthur K. Farnsworth		CI. AM	in h tanto	11-15-00
RESIDENCE				CITIZENSHIP
15915 Lausanne Drive, E	Iouston, Texas 7	77070, U.S.A	L.	U.S.A.
POST OFFICE ADDRESS				
15915 Lausanne Drive, H	louston, Texas 7	77070, U.S.A	k.	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant/Patentee: Peter W. Austin et al.	§ § §		
Filed: Herewith	\$ \$	Attorney File No.:	COMP:0133/VAN
Serial No.: Unassigned	\$ 8	,	P00-3172
For: COMPUTER SYSTEM HAVING HARD DRIVE LATCHING MECHANISM	\$ §		

POWER OF ATTORNEY BY ASSIGNEE

	x Co	Concurrently Herewith		
		Date Recorded		
	Re	Reel Frame		
				.
s to conduct the prosecution of	of the application/r	maintenance of the patent to the	exclusion of the inventor(s	j. III. stafbio
rsigned hereby declares that he	has reviewed the al	above-referenced assignment and h	ereby declares that, to the be	st or ms
1 1 Ald - in the Angiomas of	nd further declares	s that all statements made herein of	his own knowledge are true	and tha
viedge, title is in the Assignee, a	na further acciares	s that an statements made noted of		uiiu iiiu
atements made on information	and belief are belie	s that all statements made herein of leved to be true. The assignee her	ceby revokes any previous po	owers of
atements made on information	and belief are belie	leved to be true. The assignee her	ceby revokes any previous po	owers o
atements made on information	and belief are belied o prosecute this application applications.	leved to be true. The assignee her opplication/maintain this patent and	ceby revokes any previous po	owers of
atements made on information and appoints the following the emark Office connected therewith	and belief are belie o prosecute this app h:	leved to be true. The assignee her	ceby revokes any previous po	owers of
atements made on information and appoints the following the emark Office connected therewith Michael G. Fletcher	and belief are belied on prosecute this application. 32,777	leved to be true. The assignee her oplication/maintain this patent and the second seco	reby revokes any previous portransact all business in the Pa	owers of
ratements made on information and appoints the following the emark Office connected therewith Michael G. Fletcher Patrick S. Yoder	and belief are belied on prosecute this application. 32,777 37,479	leved to be true. The assignee herepplication/maintain this patent and the patent and the latest area are also are also area and the latest area are also area area. The latest area are also area area area area area area area are	reby revokes any previous pot transact all business in the Pa	owers of
ney and appoints the following to emark Office connected therewith Michael G. Fletcher Patrick S. Yoder Robert A. Van Someren	and belief are belief o prosecute this apply. h: 32,777 37,479 36,038	leved to be true. The assignee herepplication/maintain this patent and the latest and the latest area and the latest area. Irene Kosturakis	reby revokes any previous poteransact all business in the Pa 33,724 31,851	owers of
ratements made on information and appoints the following the emark Office connected therewith Michael G. Fletcher Patrick S. Yoder	and belief are belied on prosecute this application. 32,777 37,479	leved to be true. The assignee herepplication/maintain this patent and the latest and the latest area and the latest area are latest and the latest area area. It is a second and the latest area area area area area area area are	reby revokes any previous poteransact all business in the Pa 33,724 31,851 39,589	owers of
ney and appoints the following to emark Office connected therewith Michael G. Fletcher Patrick S. Yoder Robert A. Van Someren	and belief are belief o prosecute this apply. h: 32,777 37,479 36,038	leved to be true. The assignee herepplication/maintain this patent and the properties of the propertie	33,724 31,851 39,589 35,891	owers of

Please direct all communications to: Fletcher, Yoder & Van Someren, P.O. Box 692289, Houston, Texas 77269-2289, (281) 970-4545, to the attention of: Robert A. Van Someren

ASSIGNEE

COMPAQ COMPUTER CORPORATION

Date: 15 Nov 2000 BY:

NAME: Diane Strong

TITLE: Administrator, Patents

Diane Strong
Administrator, Patents
Authorized To Sign This Document On Behalf Of
Compaq Computer Corporation
Pursuant To Board Of Directors Resolution
Date July 28, 1989